


# PERFECTA 32-WRL

## CONTROL PANEL

The **PERFECTA** family control panels are designed to protect small and medium-sized premises, such as apartments, detached houses, segments of terraced houses, offices, small businesses, etc. They provide protection to the requirements of Grade 2 EN 50131.

**PERFECTA 32-WRL** is characterized by simple configuration, intuitive operation and easy control. The control panel allows you to create a wireless system and a hybrid system (combination with the traditional wired system). Two-way communication with the wireless **PRF-LCD-WRL** keypads and **MSP-300 R** sirens is realized at 433 MHz. In the wireless system, the **MICRA** series detectors and the new **MPT-350** keyfobs are also used. This allows you to easily expand the existing system, without having to lay extra cable runs.

The built-in GSM/GPRS module provides a wide range of features: interaction with the functional and intuitive **PERFECTA CONTROL** application for mobile devices (with support for PUSH messaging), remote configuration using the **PERFECTA Soft** program, reporting events (e.g. to the monitoring station security agency), voice messaging, control via SMS and audio verification (listening in to the sounds from the protected premises). Two nano-SIM cards are supported to ensure continuity of communication: if any problems occur with the first operator range, the second card is automatically selected.

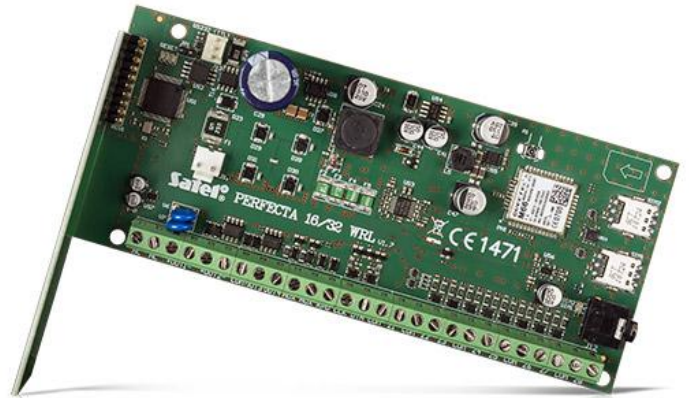

The control panel electronics board is provided with wired 8 zones and 4 outputs. Their number can be increased by connecting the extension modules: **INT-E** zone expander and **INT-O** or **INT-ORS** output expanders. This allows you to expand the system by adding more detectors, sirens, and even actuators (to control the garage door, roller shutters, garden sprinklers).

The control panel enables the object (premises) to be divided into two partitions, with three armed modes to select from (day, night, full). Each zone can be assigned to one or both of the supervised areas.

The system can be configured in two ways: using the intuitive **PERFECTA Soft** program (from a computer connected with RS-232 (TTL) cable or remotely) and from a keypad, using shortcuts in the service menu.

- compliance with **EN 50131 Grade 2**
- from 8 to 32 programmable wired zones:
  - selectable configuration: NO, NC, EOL, 2EOL/NO, 2EOL/NC
  - support for roller shutter detectors / vibration detectors
- from 4 to 12 programmable wired outputs
- 2 power outputs on mainboard
- additional 4 wireless outputs for operating **MSP-300** wireless sirens
- built-in modules:
  - GSM/GPRS with 2 SIM slots (SMS, reporting to monitoring station, mobile application, PUSH notifications)
  - voice (playback of voice messages for telephone messaging purposes)
  - audio alarm verification (listening in)
- integrated radio module operating at 433 MHz and providing encrypted wireless communication:
  - two-way with **PRF-LCD-WRL** keypads and **MSP-300 R** sirens
  - one-way with **MICRA** family detectors and **MPT-350** keyfobs
- system division into 2 partitions:
  - 3 detection modes in each partition
  - optional assignment of each zone to two partitions
  - user control or timer control option
- communication bus for connecting keypads (**PRF-LCD**) and expansion modules (**INT-E**, **INT-O**, **INT-ORS**)
- system control by using:
  - keypads (up to 4): wired **PRF-LCD** or wireless **PRF-LCD-WRL**
  - **PERFECTA CONTROL** mobile application

- MPT-350 remote control keyfobs (up to 15)
- firmware updates available
- passwords:
  - 15 user codes
  - 1 service code
- editable names (of users, partitions, zones, outputs and modules) for easy control and supervision of the system
- timers:
  - 8 timers with exceptions setting capability
- memory of 3584 events
- automatic diagnostics of main components of the system
- built-in switching power supply:
  - overload protection
  - battery deep discharge protection
  - battery charging current control
- programming control panel settings:
  - locally – keypad, computer with PERFECTA Soft program installed, connected to the control panel RS-232 (TTL) port
  - remotely – computer with PERFECTA Soft program installed, connecting to the control panel via GPRS

**TECHNICAL DATA**

Voice messages	16
Event log	3584
Partitions	2
Timers	8
Board dimensions	160 x 110 mm
Operating temperature range	-10...+55 °C
Supply voltage (±15%)	18 V AC, 50-60 Hz
Standby mode current consumption	220 mA
Max. current consumption	240 mA
Weight	115 g
Maximum humidity	93±3%
Current consumption from battery - standby	120 mA
Battery failure voltage threshold (±10%)	11 V
Battery cut-off voltage (±10%)	10,5 V
Environmental class according to EN50130-5	II
Maximum current consumption from the battery	180 mA
Programmable wired inputs	8
Maximum number of programmable inputs	32
Programmable wired outputs	4
Maximum number of programmable outputs	16
Supplying outputs	2
Communication buses	1
Keypads	up to 4
Security grade according to EN 50131	Grade 2
Current-carrying capacity, AUX output	500 mA / 12 V DC
Recommended transformer	40 VA
Users	15
Current-carrying capacity of KPD output	500 mA / 12 V DC
Output voltage range	10,5V...14 V DC
Battery charging current	500 mA
Power supply output voltage	12 V DC ±15%
Telephone numbers for notification	8
Power supply output current	2 A
Low current programmable outputs rating	25 mA / 12 V DC
Current-carrying capacity of programmable high-current outputs	1000 mA / 12 V DC