

ACCO-KP-PS


DOOR CONTROLLER WITH POWER SUPPLY

Growing market demand for standalone access control system inspired SATEL's engineers to develop flexible solution that meets the requirements of numerous groups of customers.

ACCO system consist of distributed intelligent devices networked for central supervision and management. The combination of proven hardware and software solutions with though out system concept ensures the highest possible quality and makes it suitable for individual needs.

FEATURES

- support for single door with entry and exit authorization
- standalone or **ACCO** system operation mode
- 1024 users
- user rights definition
- access authorization with proximity card and/or code
- 256 schedules
- holiday schedules
- non-volatile 24576 event log
- work time registration event tagging
- anti-passback
- programming means:
 - permanently or temporarily connected LCD keypad
 - PC connected via RS-232 port
 - PC connected via **ACCO-USB** interface to RS-485 bus
- non volatile settings memory
- FLASH based firmware update
- scheduled door locking and unlocking
- programmable limits on number of accesses
- switching mode backup power supply 12 V DC 1.2 A

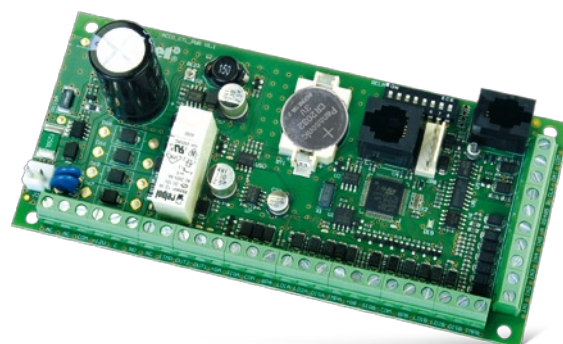

TECHNICAL SPECIFICATION

Supply voltage	18 V AC \pm 10%
Power supply output voltage, rated	12 V DC \pm 15%
Power supply output current	1.2 A
Maximum current consumption	110 mA
Maximum relay switching voltage	250 V AC
Maximum relay switching current	8 A
Current-carrying capacity, OC type outputs	50 mA
Battery charging current	350 mA
Recommended battery	12 V / 7 Ah
Working temperature range	-10°C...+55°C
Electronics board dimensions	151 x 70 mm
Weight	113 g