
VERSA Plus

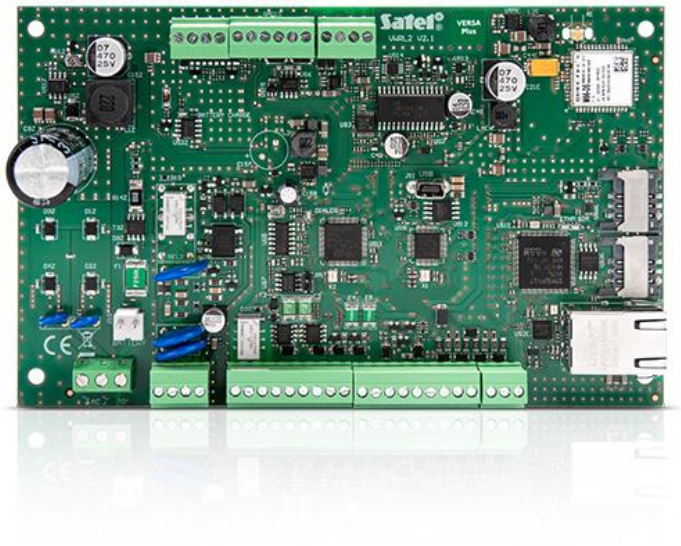

The **VERSA Plus** control panel is designed for protection of small and medium–sized premises. It allows you to create a wired or wireless system – it is compatible with **ABAX 2** (**ACU–220**, **ACU–280**) and **ABAX** (**ACU–120**, **ACU–270**) as well as **MICRA** (**VERSA–MCU**) wireless systems controllers.

The VERSA Plus is the solution that combines features of several separate devices. Its motherboard integrates the following modules: Ethernet, cellular GSM/GPRS, PSTN dialer, voice and acoustic alarm verification. As a result, the VERSA Plus control panel enables communication via three channels (Ethernet, cellular network, PSTN), thus ensuring effective transfer of information.

- EN50131 Grade 2 compliance
- 4 programmable wired zones:
  - support for NO and NC type detectors, and roller shutter and shock detectors
  - support for EOL and 2EOL configuration
- additional tamper input, NC type
- 5 programmable wired outputs:
  - 2 high–current outputs
  - 2 low–current outputs, OC type
  - 1 relay output
- 3 power outputs
- output for connecting dedicated enclosure–mounted piezoelectric transducer (acoustic signaling)
- maximum number of programmable zones: 30
- maximum number of programmable outputs: 12
- system subdivision into 2 partitions:
  - each zone can be assigned to two partitions
- system control by means of:
  - keypads:
    - LED with mechanical keyboard – **VERSA LED**
    - LCD with mechanical keyboard – **VERSA–LCD**, **VERSA–LCDM**
    - wireless LCD with mechanical keyboard – **VERSA–KWRL2**
    - touchscreen – **INT–TSG2**, **INT–TSH2**
  - partition control module (**INT–CR** – using cards, key fobs and other passive transponders)
  - remote control keyfobs
  - mobile application **VERSA CONTROL**
  - phone (SMS, voice menu)
- integrated modules:
  - Ethernet (reporting to monitoring station, e–mail messaging, mobile application, remote programming)
  - cellular GSM/GPRS (reporting to monitoring station, voice/SMS messaging, SMS/voice menu remote control, mobile application, remote programming)
  - PSTN dialer (reporting to monitoring station, voice messaging, voice menu remote control, remote programming)
  - voice (playback of voice messages for the needs of telephone messaging and voice menu)
  - audio alarm verification (listening in)
- built–in USB MINI–B socket, for programming the control panel and updating its firmware using a computer
- memory of 2047 events
- capability to handle 30 users and assign to each of them:
  - code
  - proximity card or other passive transponder
  - keyfob
- 4 timers to enable automatic:
  - arming/disarming partitions

The actual appearance of the products may differ from the presented images. Product descriptions are provided in the web service for information purposes only.

- control of outputs (turning light ON/OFF, watering garden, etc.)
- plug–in terminal blocks

Notification e-mail addresses	8
Programmable wired outputs	5
Maximum number of programmable outputs	12
Supplying outputs	3
Communication buses	1
Keypads	up to 6
Security grade according to EN 50131	Grade 2
Recommended transformer	40 VA
Mass (incl. enclosure and accessories)	1250 g
Users	30
Maximum number of programmable inputs	30
Text messages	64
Current-carrying capacity of KPD output	500 mA / 12 V DC
Output voltage range	10,5 V...14 V DC
Battery charging current	800 mA
Low current programmable outputs rating	50 mA / 12 V DC
Current-carrying capacity of programmable high-current outputs	1100 mA / 12 V DC
AUX output	500 mA / 12 V DC
+VR output	200 mA / 12 V DC
Programmable relay output	1000 mA / 30 V DC
Maximum humidity	93±3%
Messaging telephone numbers	8
Event log	2047
Partitions	2
Timers	4
Power supply rating	2 A
Enclosure dimensions	266 x 286 x 100 mm
Board dimensions	173 x 105 mm
Operating temperature range	-10...+55 °C
Supply voltage (±15%)	18 V AC, 50-60 Hz
Voice messages	16
Current consumption from battery - maximum	340 mA
Current consumption from battery - standby	180 mA
Battery failure voltage threshold (±10%)	11 V
Battery cut-off voltage (±10%)	10,5 V
Environmental class according to EN50130-5	II
Current consumption from the 230V network in standby	120 mA
Maximum current consumption from the 230V network	200 mA
Power supply output voltage	12 ±15% V DC
Programmable wired inputs	4

The actual appearance of the products may differ from the presented images. Product descriptions are provided in the web service for information purposes only.