


The PIN5/RJ-TTL cable enables the RS-232 port of ETHM-1 module (PIN5 type socket) to be connected to the RS-232 (TTL) port of VERSA control panel (RJ type socket). The connection of ports is required if the panel is to be programmed with the DLOADX program over Ethernet.

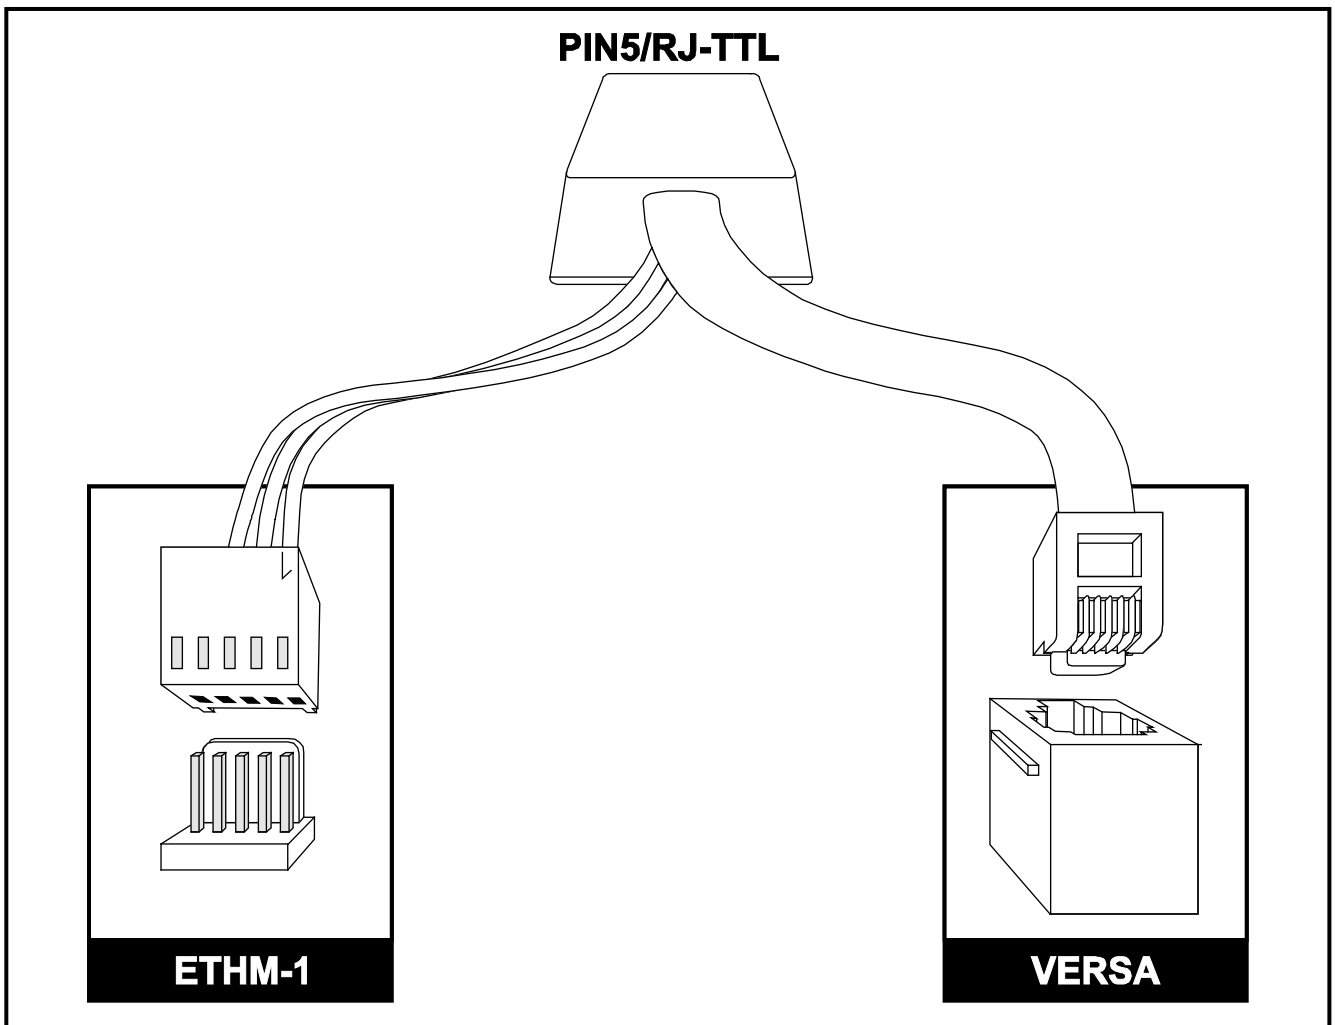

Latest EC declaration of conformity and product approval certificates are available for downloading on website www.satel.eu